


- Standard lights can be placed on opposite side
- Suction connection
- Ø Drain always on the same side as the spots
 - Counter-current system (optional) 4




- 2 additional inlets
- Additional circulation (optional)



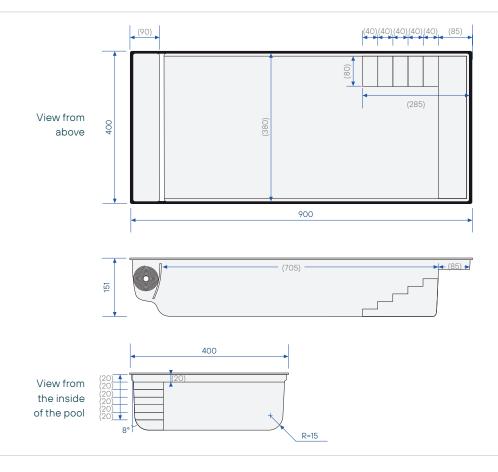

External (Internal) dimensions in cm – tolerance $\pm 2\%$

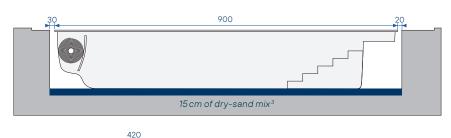



Note: the digging sizes do not take into account the necessary space for the coping stones.

Needed for unloading & placing the pool. Depth taken from under the coping stone. Mix of sand and cement, at a ratio of 250 kg per ton.

^{4.} If combined with a counter current system, the position of inlets(s) may differ.